


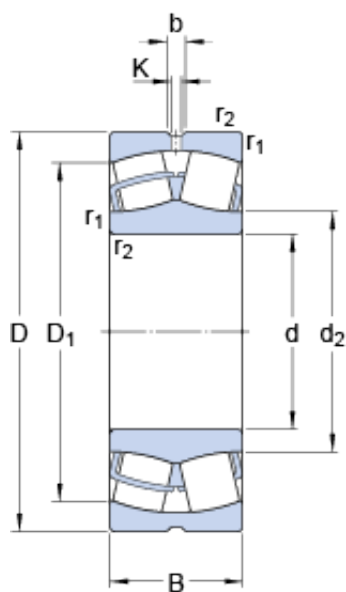

Bearing No. 22212 E

b	6 mm
K	3 mm
d	60 mm
D	110 mm
B	28 mm
Noun	Bearing
Bore	2.362 Inch 60 Millimeter
Width	1.102 Inch 28 Millimeter
UNSPSC	31171510
series:	222
Category	Spherical Roller Bearing
Size (mm)	110x60x28
Enclosure	Open
Inventory	0.0
bore type:	Straight
Width (mm)	28
cage type:	Inner Ring Guided
maximum rpm:	7500 RPM
Weight / LBS	2.586
Bore Profile	Straight
Mass bearing	1.15 kg
D1	96.5 mm
Cage Material	Steel
closure type:	Open
d2	72.7 mm
Product Group	B04311
Inch - Metric	Metric
fillet radius:	1.5 mm

cage material:	Steel
overall width: bore	28 mm
diameter:	60 mm
Keyword String	Spherical
Withdrawal Nut	Not Applicable
Relubricatable	Yes
Bearing number	22212 E
Limiting speed	7500 r/min
finish/coating:	Uncoated
Rolling Element	Spherical Roller Bearing
Mounting Method	Shaft Mount
Reference speed	5600 r/min
outer ring type:	Not Split
Manufacturer URL	http://www.skf.com
Outside Diameter	4.331 Inch 110 Millimeter
Long Description	60MM Straight Bore; 110MM Outside Diameter; 28MM Width; C0-Medium Clearance; Shaft Mount; Double Row of Spherical Roller Bearings; Steel Cage Material; Open Enclosure; Relubricatable
outside diameter:	110 mm
Weight / Kilogram	1.174
precision rating:	Not Rated
bearing material:	Steel
Withdrawal Sleeve	Not Applicable
outer ring width:	28 mm
Manufacturer Name	SKF
Da max.	101 mm
Bore Diameter (mm)	110

Internal Clearance ra	C0-Medium
max.	1.5 mm
da min. Adapter Part	69 mm
Number	Not Applicable Inch Not Applicable Millimeter
Outer Diameter (mm)	60
internal clearance:	C0
r1,2 min.	1.5 mm
Minimum Buy Quantity	N/A
da - min.	69 mm
Da - max.	101 mm
ra - max.	1.5 mm
Calculation factor e	0.24
D1 ?	96.5 mm
d2 ?	72.7 mm
static load capacity:	166 kN
Calculation factor - e	0.24
dynamic load capacity:	156 kN
r1,2 - min.	1.5 mm
lubrication hole type:	Lubrication Groove & Hole
Harmonized Tariff Code	84823080
Number of Rows of Rollers	Double Row
Basic dynamic load rating C	159 kN
operating temperature range:	Maximum of +390 °F
Basic dynamic load rating - C	159 kN
Calculation factor Y1	2.8
Fatigue load limit Pu	18.6 kN
Calculation factor Y2	4.2
Calculation factor Y0	2.8

Calculation factor - Y1	2.8
Calculation factor - Y2	4.2
Calculation factor - Y0	2.8
Fatigue load limit - Pu	18 kN
Basic static load rating C0	166 kN
Basic static load rating - C0	163 kN