


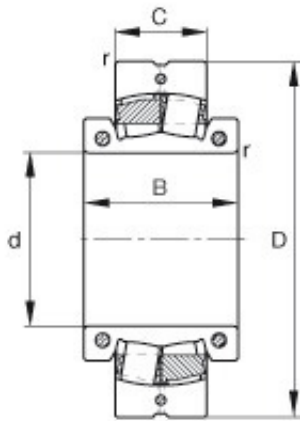

Bearing No. 230S.808

|                |                                                                         |
|----------------|-------------------------------------------------------------------------|
|                | H3048.808                                                               |
| e              | 0,23                                                                    |
| m              | 58,9 kg / Weight                                                        |
| d              | 8 1/2 inch                                                              |
| D              | 360 mm                                                                  |
| C              | 92 mm                                                                   |
| B              | 156 mm                                                                  |
| Size (mm)      | 215.9x360x92                                                            |
| Width (mm)     | 92                                                                      |
| SNP3048.808    | Designation, adapter sleeve, US design                                  |
| Cr             | 1100000 N / Dynamic load rating (radial)                                |
| Y1             | 2,9                                                                     |
| Y2             | 4,31                                                                    |
| Y0             | 2,83                                                                    |
| nG             | 730 1/min / Limiting speed                                              |
| Mi             | 120 Nm / Tightening torque per clamping screw                           |
| Ma             | 35 Nm / Tightening torque per clamping screw                            |
| C0r            | 1830000 N / Static load rating (radial)                                 |
| Cur            | 152000 N / Fatigue limit load, radial                                   |
| Bearing number | 230S.808                                                                |
| rmin           | 3 mm                                                                    |
| Fa max         | 32000 N / Permissible axial load, for inner ring without axial abutment |

|                     |       |
|---------------------|-------|
| Bore Diameter (mm)  | 215,9 |
| Outer Diameter (mm) | 360   |