


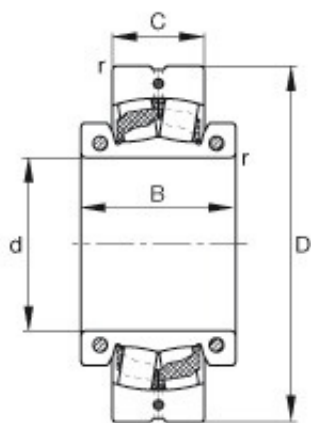

Bearing No. 222SM80-TVPA

	H318 / Adapter sleeve
d	80 mm
D	160 mm
C	40 mm
B	70 mm
m	4,82 kg / Weight
e	0,22
Size (mm)	80x160x40
Width (mm)	40
Y0	3,07
Ma	9 Nm / Tightening torque per clamping screw
Mi	14 Nm / Tightening torque per clamping screw
nG	2160 1/min / Limiting speed
Cr	212000 N / Dynamic load rating (radial)
Y2	4,67
Y1	3,14
C0	270000 N / Static load rating (radial)
C _{ur}	25500 N / Fatigue limit load, radial
Bearing number	222SM80-TVPA
r _{min}	2 mm
F _a max	7600 N / Permissible axial load, for inner ring without axial abutment
Bore Diameter (mm)	80
Outer Diameter (mm)	160