


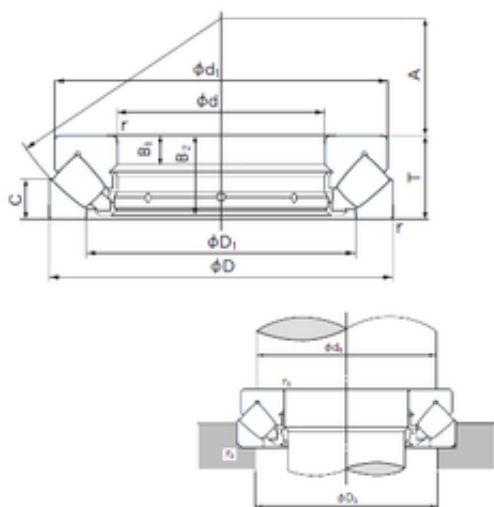

Bearing No. 29392E

C	72 mm
B	51 mm
d	460 mm
D	710 mm
T	150 mm
A	257 mm
B1	51 mm
D1	567 mm
d1	685 mm
B2	144 mm
Width	150 mm
r min.	6 mm
Weight	216 Kg
da min.	575 mm
Da max.	630 mm
ra max.	5 mm
da (min)	575 mm
Da (max)	630 mm
ra (max)	5 mm
Bore Type	Cylindrical Bore
Enclosure	Open
Bore Size	460 mm
Size (mm)	460x710x150
Width (mm)	150
Configuration	Single Row
Bearing number	29392E
Outside Diameter	710 mm
Static Load Rating	21,700,000 N
Bore Diameter (mm)	460
Dynamic Load Rating	4,600,000 N

Outer Diameter (mm)	710
Limiting Speed - Oil	430 rpm
Fillet Radius/Chamfer	6 mm
Basic dynamic load rating (C)	4600 kN
Basic static load rating (C0)	21700 kN